



## PRODUCT OFFERING

### ABS Anchor Bolts

#### Stop ATM Theft


ATM theft is attempted by someone everyday and can take as little as three minutes. Using the ABS Anchor bolts virtually prevents removal of an ATM.

Tests have proven the ABS Anchor Bolt can withstand:

- 10,000 lbs of Pressure per bolt
- An 8.5 earthquake simulation

#### Installation

1. Drill 4 holes (hammer drill recommended) at least 4" into floor using a 11/16-drill bit. Holes must be in exact location. (This bit will last for about ten installations).
2. Insert ABS Anchor until washer is flush with surface making sure the nuts, bolt, sleeves, and spacers are snug. (This will require tapping the Anchor. Use care in not damaging the top of the Anchor. The use of a sleeve to protect it is normally a good idea.)
3. Tighten the nut to approximately 50 lbs then loosen the nut approximately 4 turns. (This only sets the Sleeves.)
4. Using a ¼ nut driver you can now remove the shaft part of the ANCHOR. The bottom is now set. Slide ATM over bolt hole then insert washer inside machine. Thread bolt back in hole. Leave about 1" above washer. Then tighten bolt.
5. Repeat steps 2 through 4 for all 4 bolts.
6. Place ATM to be secured over the hole.
7. Reinsert the shaft part of the Anchor getting at least, but not limited to 7 full turns in the base of the anchor.
8. Now tighten the nut to at least 60 lbs.

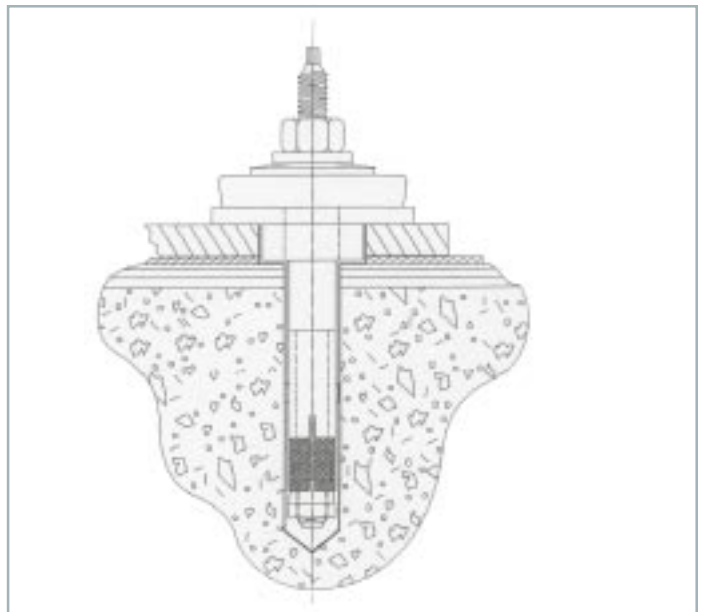

410 N. Boylan Ave.  
Raleigh, NC 27603

Telephone: 866-535-5005

Fax: 919-535-1781